


Kable Kontrol® Butt Splice Connector - Insulated
Technical Specifications

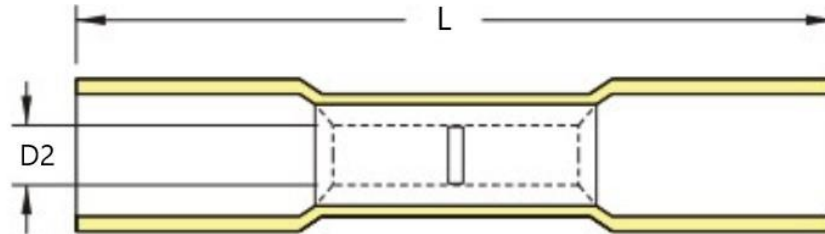

Part Number	Wire Range (AWG/mm2)	Dimensions		Insulated Color
		D2	L	
HSBC-2218-RD	22 - 18 AWG (0.2 - 0.5 mm2)	0.067" (1.7mm)	1.417" (36 mm)	Red
HSBC-1614-BL	16 - 14 AWG (1.5 - 2.5 mm2)	0.091" (2.3 mm)	1.417" (36 mm)	Blue
HSBC-1210-YL	12 - 10 AWG (4 - 6 mm2)	0.134" (3.4 mm)	1.614" (41 mm)	Yellow