


High Voltage Tubing [2:1]




Kable Kontrol® High Voltage Heat Shrink Tubing is essential in protecting and extending the life of your electric vehicle’s electrical system. With a voltage rating of up to 2500V, this tubing is built to handle demanding high-voltage applications in electric vehicles, battery packs, inverters, motor wiring, and charging ports. The bright orange color aids in identifying high-voltage cables, following SAE safety guidelines, making it easier for emergency responders to locate critical wiring in vehicles. Certified RoHS compliant and UL Listed (File No. E536025), this tubing meets UL224 standards and is tested in accordance with ASTM D2671 for safety and performance.

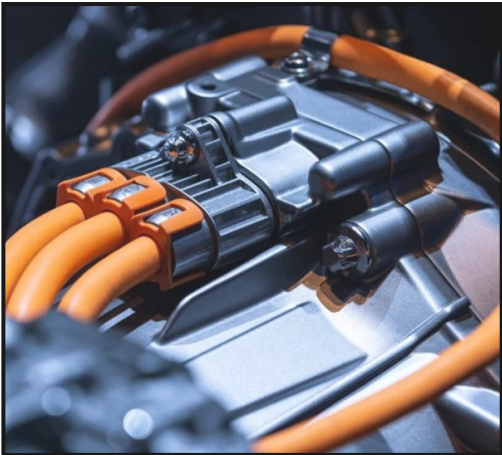

- **Material:** Polyolefin
- **Operating Temperature Range** -67°F to 257°F
- **Rated for 2500V**
- **Chemical Resistant**

- **UL Listed| File E536025**
- **RoHS Compliant**
- **ASTM D2671 and UL224 Compliant and SAE standards for automotive safety / EV**

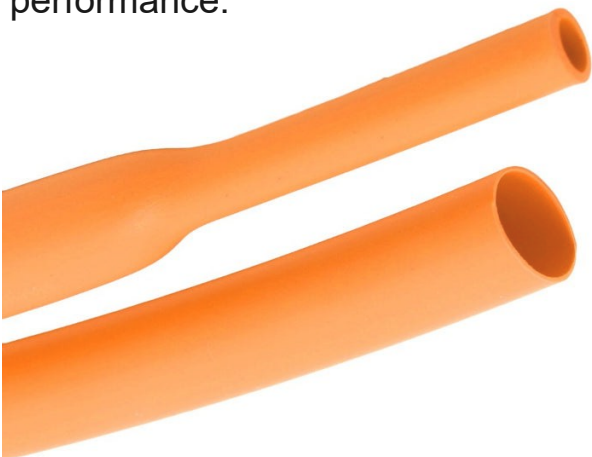

SKU	Inside Diameter	Color	Sizing (ft)
HSTW125-21-075-200-OR	3/4"	Or	200'
HSTW125-21-100-100-OR	1"	Or	100'
HSTW125-21-125-100-OR	1-1/4"	Or	100'
HSTW125-21-150-100-OR	1-1/2"	Or	100'