


Kable Kontrol® Nylon Insulated Twin Wire Ferrules Connectors
Technical Specifications

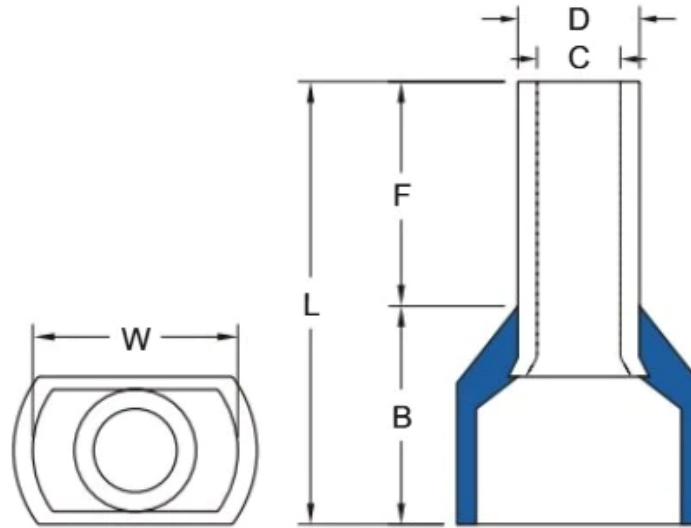

Part Number	Wire Range (AWG/mm ²)	Pin Size (D2)	Color	Dimensions					
				F	L	W	B	D	C
WFT-20-WH-500	2 x 20 AWG (0.75 mm ²)	10 mm	White	0.394" (10 mm)	0.657" (16.7 mm)	0.217" (5.5 mm)	0.264" (6.7 mm)	0.083" (2.1 mm)	0.071" (1.8 mm)
WFT-18-RD-500	2 x 18 AWG (1.0 mm ²)	10 mm	Red	0.394" (10 mm)	0.673" (17.1 mm)	0.217" (5.5 mm)	0.280" (7.1 mm)	0.094" (2.4 mm)	0.083" (2.1 mm)
WFT-16-BK-500	2 x 16 AWG (1.5 mm ²)	10 mm	Black	0.709" (18 mm)	1.004" (25.5 mm)	0.252" (6.4 mm)	0.295" (7.5 mm)	0.102" (2.6 mm)	0.091" (2.3 mm)
WFT-12-GY-500	2 x 12 AWG (4.0 mm ²)	12 mm	Gray	0.472" (12 mm)	0.909" (23.1 mm)	0.339" (8.6 mm)	0.437" (11.1 mm)	0.165" (4.2 mm)	0.150" (3.8 mm)