


Technical Specifications

Kable Kontrol® Nylon Insulated Wire Ferrules

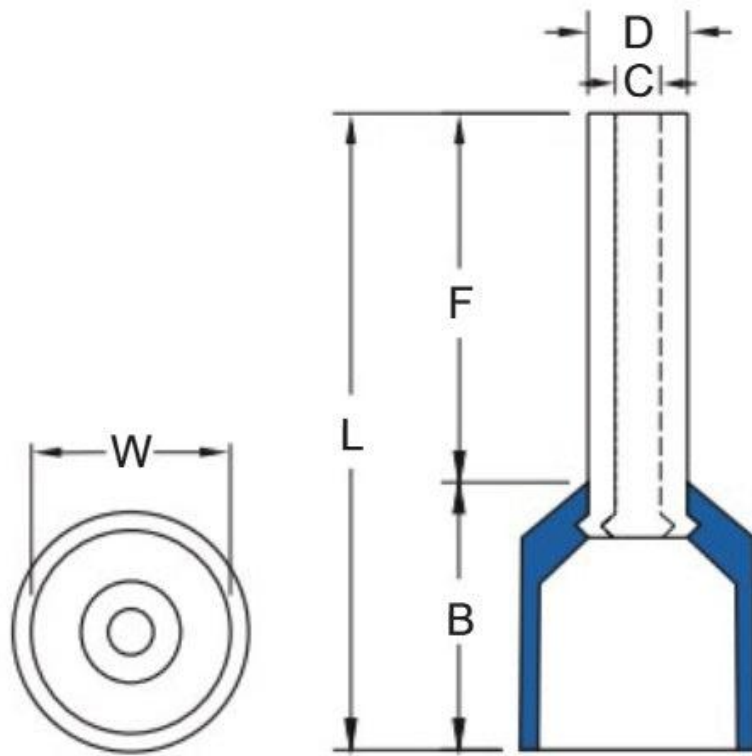

Part Number	Wire Range (AWG/mm ²)	Pin Size (D2)	Color	Dimensions					
				F	L	W	B	D	C
WFS-2018-GY-500	22 - 18 AWG (0.75 mm ²)	10	Grey	0.394" (10 mm)	0.642" (16.3 mm)	0.110" (2.8 mm)	0.248" (6.3 mm)	0.059" (1.5 mm)	0.047" (1.2 mm)
WFS-16-RD-500	16 AWG (1.5 mm ²)	10	Red	0.394" (10 mm)	0.630" (16 mm)	0.138" (3.5 mm)	0.248" (6.3 mm)	0.079" (2 mm)	0.067" (1.7 mm)
WFS-14-BL-500	14 AWG (2.5 mm ²)	10	Blue	0.394" (10 mm)	0.685" (17.4 mm)	0.165" (4.2 mm)	0.291" (7.4 mm)	0.098" (2.5 mm)	0.087" (2.2 mm)
WFS-12-GY-500	12 AWG (4.0 mm ²)	12	Grey	0.472" (12 mm)	0.787" (20 mm)	0.189" (4.8 mm)	0.291" (7.4 mm)	0.126" (3.2 mm)	0.110" (2.8 mm)