


Kable Kontrol® PVC Vinyl Insulated Spade Wire Terminal

Technical Specifications

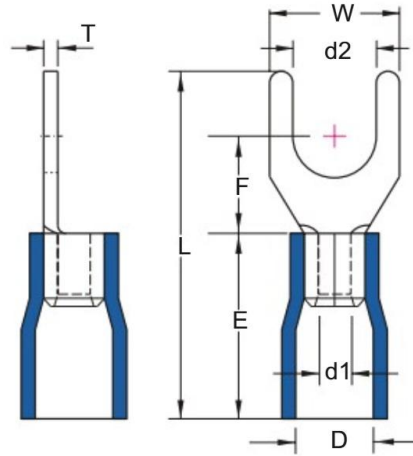

Part Number	Wire Range (AWG/mm2)	Stud Size (D2)	Dimensions							Insulated Color
			W	F	L	E	D	D1	T	
STPVC-2218-6-RD	22-18 AWG	#6	0.224" (5.7 mm)	0.256" (6.5 mm)	0.630" (16.0 mm)	0.189" (4.8 mm)	0.134" (3.4 mm)	0.067" (1.7 mm)	0.030" (0.75 mm)	Red
STPVC-1614-6-BL	16-14 AWG	#6	0.224" (5.7 mm)	0.256" (6.5 mm)	0.630" (16.0 mm)	0.189" (4.8 mm)	0.161" (4.1 mm)	0.091" (2.3 mm)	0.031" (0.80 mm)	Blue
STPVC-1210-6-YL	12-10 AWG	#6	0.283" (7.2 mm)	0.295" (7.5 mm)	0.685" (17.4 mm)	0.236" (6.0 mm)	0.220" (5.6 mm)	0.134" (3.4 mm)	0.039" (1.00 mm)	Yellow
STPVC-2218-8-RD	22-18 AWG	#8	0.252" (6.4 mm)	0.256" (6.5 mm)	0.630" (16.0 mm)	0.189" (4.8 mm)	0.134" (3.4 mm)	0.067" (1.7 mm)	0.030" (0.75 mm)	Red
STPVC-1614-8-BL	16-14 AWG	#8	0.252" (6.4 mm)	0.256" (6.5 mm)	0.630" (16.0 mm)	0.189" (4.8 mm)	0.161" (4.1 mm)	0.091" (2.3 mm)	0.031" (0.80 mm)	Blue
STPVC-1210-8-YL	12-10 AWG	#8	0.327" (8.3 mm)	0.276" (7.0 mm)	0.720" (18.3 mm)	0.236" (6.0 mm)	0.220" (5.6 mm)	0.134" (3.4 mm)	0.039" (1.00 mm)	Yellow
STPVC-2218-10-RD	22-18 AWG	#10	0.319" (6.4 mm)	0.256" (6.5 mm)	0.630" (16.0 mm)	0.189" (4.8 mm)	0.134" (3.4 mm)	0.067" (1.7 mm)	0.030" (0.75 mm)	Red
STPVC-1614-10-BL	16-14 AWG	#10	0.319" (8.1 mm)	0.256" (6.5 mm)	0.630" (16.0 mm)	0.189" (4.8 mm)	0.189" (4.8 mm)	0.091" (2.3 mm)	0.031" (0.80 mm)	Blue
STPVC-1210-10-YL	12-10 AWG	#10	0.354" (9.0 mm)	0.276" (7.0 mm)	0.720" (18.3 mm)	0.236" (6.0 mm)	0.220" (5.6 mm)	0.134" (3.4 mm)	0.039" (1.00 mm)	Yellow