


Kable Kontrol® Ring Terminal Connector - PVC Vinyl Insulated

Technical Specifications

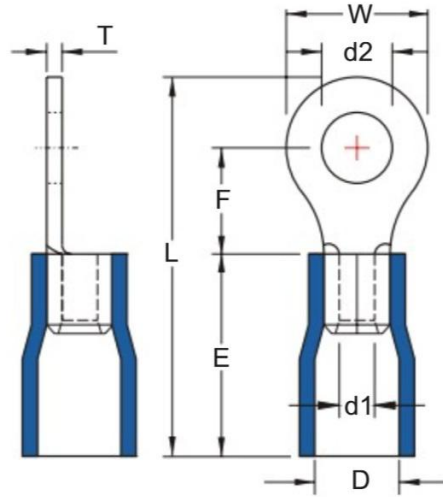

Part Number	Wire Range	Stud Size (D2)	Insulated Color	Dimensions						
				W	F	L	E	D	D1	T
RTPVC-2218-6-RD	22 - 18 AWG (0.2 - 0.5mm ²)	#6	Red	0.217" [5.5 mm]	0.197" [5.0 mm]	0.689" [17.5 mm]	0.394" [10 mm]	0.157" [4 mm]	0.067" [1.7 mm]	0.030" [0.75 mm]
RTPVC-1614-6-BL	16 - 14 AWG (1.5 - 2.5 mm ²)	#6	Blue	0.260" [6.6 mm]	0.189" [4.8 mm]	0.701" [17.8 mm]	0.394" [10 mm]	0.177" [4.5 mm]	0.091" [2.3 mm]	0.031" [0.8 mm]
RTPVC-1210-6-YL	12 - 10 AWG (4 - 6 mm ²)	#6	Yellow	0.283" [7.2 mm]	0.240" [6.1 mm]	0.894" [22.7 mm]	0.512" [13 mm]	0.252" [6.4 mm]	0.134" [3.4 mm]	0.039" [1 mm]
RTPVC-2218-8-RD	22 - 18 AWG (0.2 - 0.5mm ²)	#8	Red	0.260" [6.6 mm]	0.248" [6.3 mm]	0.764" [19.4 mm]	0.394" [10 mm]	0.157" [4 mm]	0.067" [1.7 mm]	0.030" [0.75 mm]
RTPVC-1614-8-BL	16 - 14 AWG (1.5 - 2.5 mm ²)	#8	Blue	0.260" [6.6 mm]	0.243" [6.3 mm]	0.764" [19.4 mm]	0.394" [10 mm]	0.177" [4.5 mm]	0.091" [2.3 mm]	0.031" [0.8 mm]
RTPVC-1210-8-YL	12 - 10 AWG (4 - 6 mm ²)	#8	Yellow	0.283" [7.2 mm]	0.240" [6.1 mm]	0.894" [22.7 mm]	0.512" [13 mm]	0.252" [6.4 mm]	0.134" [3.4 mm]	0.039" [1 mm]
RTPVC-2218-10-RD	22 - 18 AWG (0.2 - 0.5mm ²)	#10	Red	0.315" [8.0 mm]	0.276" [7 mm]	0.819" [20.8 mm]	0.394" [10 mm]	0.157" [4 mm]	0.067" [1.7 mm]	0.030" [0.75 mm]
RTPVC-1614-10-BL	16 - 14 AWG (1.5 - 2.5 mm ²)	#10	Blue	0.335" [8.5 mm]	0.307" [7.8 mm]	0.858" [21.8 mm]	0.394" [10 mm]	0.177" [4.5 mm]	0.091" [2.3 mm]	0.031" [0.8 mm]
RTPVC-1210-10-YL	12 - 10 AWG (4 - 6 mm ²)	#10	Yellow	0.283" [7.2 mm]	0.240" [6.1 mm]	0.894" [22.7 mm]	0.512" [13 mm]	0.252" [6.4 mm]	0.134" [3.4 mm]	0.039" [1 mm]