




Dome-Top® Barb Ty Cable Ties – Nylon 6.6

- For temperature applications up to 185°F (85°C) – indoor use
- Dome-top head features unique patented design with round, smooth edges
- Stainless steel locking barb provides consistent performance, reliability, and infinite adjustability through entire bundle range
- High strength and low thread force
- A variety of materials and colors are available for specific applications
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation
- UL Listed for use in plenum or air handling spaces per NEC

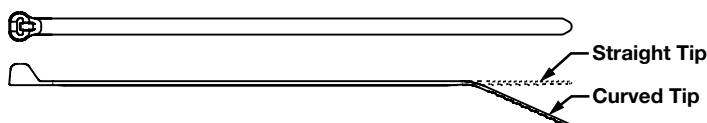

Part Number	Length In. (mm)	Width In. (mm)	Max Bundle Diameter In. (mm)	Minimum Loop Tensile Strength Lbs. (N)	Material	Color	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Pkg. Qty.	Installation Tools
-------------	-----------------	----------------	------------------------------	--	----------	-------	-----------------------	-------------------	---------------------------	---------------	-----------	--------------------

Miniature Cross Section

BT1M-C	4.0 (102)	0.095 (2.4)	0.90 (23)	18 (80)	Nylon 6.6	Natural	—	✓	V2	2, 21	100	GTS-E, GS2B-E, PTS, PPTS, STS2
--------	--------------	----------------	--------------	---------	-----------	---------	---	---	----	-------	-----	--

Intermediate Cross Section

BT1.5I-C	6.1 (155)	0.141 (3.6)	1.50 (38)	40 (178)	Nylon 6.6	Natural	—	✓	V2	2, 21	100	GTS-E, GS2B-E, PTS, PPTS, STS2
BT2I-C	8.0 (203)		2.00 (51)									
BT3I-C	11.3 (287)		3.00 (76)									

Standard Cross Section

BT2S-C	8.0 (203)	0.185 (4.7)	2.00 (51)	50 (222)	Nylon 6.6	Natural	—	✓	V2	2, 21, 2S, 21S	100	GTS-E, GS2B-E, GTH-E, GS4H-E, PTS, PTH, PPTS, STS2, STH2
BT3S-C	12.0 (305)		3.00 (76)									
BT4S-C	15.1 (384)		4.00 (102)								1000	
EST SELLER BT4S-M												


Light-Heavy Cross Section (Straight Tip)

BT4LH-L	14.9 (378)	0.275 (7.0)	4.00 (102)	120 (534)	Nylon 6.6	Natural	—	✓	V2	2, 21, 2S, 21S	50	GTH-E, GS4H-E, GS4EH-E, PTH, STH2, ST3EH
BT5LH-L	18.1 (460)		5.00 (127)									
BT7LH-L	24.4 (620)		7.00 (178)									
BT9LH-L	30.7 (780)		9.00 (229)									



Dome-Top® Barb Ty Cable Ties – Weather Resistant Nylon 6.6

- Greater resistance to damage caused by ultraviolet light – indoor or outdoor use
- Weather resistant temperature is 185°F (85°C)
- Dome-top head features unique patented design with round, smooth edges
- Stainless steel locking barb provides consistent performance, reliability, and infinite adjustability through entire bundle range
- High strength and low thread force
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation
- UL Listed for use in plenum or air handling spaces per NEC



Part Number	Length In. (mm)	Width In. (mm)	Max Bundle Diameter In. (mm)	Minimum Loop Tensile Strength Lbs. (N)	Material	Color	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Pkg. Qty.	Installation Tools
-------------	--------------------	-------------------	---------------------------------------	--	----------	-------	--------------------------	-------------------------	---------------------------------	---------------------	--------------	-----------------------

Miniature Cross Section

BT1M-C0	4.0 (102)	0.095 (2.4)	0.90 (23)	18 (80)	Weather Resistant Nylon 6.6	Black	UV Resistant	✓	V2	2, 21	100	GTS-E, GS2B-E, PTS, PPTS, STS2
BT1.5M-C0	6.3 (160)		1.50 (38)									
BT2M-C0	7.9 (201)		2.00 (51)									

Intermediate Cross Section

BT1.5I-C0	6.1 (155)	0.141 (3.6)	1.50 (38)	40 (178)	Weather Resistant Nylon 6.6	Black	UV Resistant	✓	V-2	2, 21	100	GTS-E, GS2B-E, PTS, PPTS, STS2
BT2I-C0	8.0 (203)		2.00 (51)									
BEST SELLER BT3I-C0	11.3 (287)		3.00 (76)									
BT4I-C0	14.3 (363)		4.00 (102)									

Standard Cross Section

BT2S-C0	8.0 (203)	0.185 (4.7)	2.00 (51)	50 (222)	Weather Resistant Nylon 6.6 Weather	Black	UV Resistant	✓	V-2	2, 21, 2S, 21S	100	GTS-E, GS2B-E, GTH-E, GS4H-E, PTS, PTH, PPTS, STS2, STH2
BEST SELLER BT2S-M0											1000	
BEST SELLER BT3S-C0	12.0 (305)		3.00 (76)								100	
BEST SELLER BT3S-M0											1000	
BEST SELLER BT4S-C0	15.1 (384)		4.00 (102)								100	
BEST SELLER BT4S-M0											1000	

(continued on next page)




Dome-Top® Barb Ty Cable Ties – Weather Resistant Nylon 6.6 *(continued)*

Part Number	Length In. (mm)	Width In. (mm)	Max Bundle Diameter In. (mm)	Minimum Loop Tensile Strength Lbs. (N)	Material	Color	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Pkg. Qty.	Installation Tools		
Light-Heavy Cross Section (Straight Tip)														
BT2LH-L0	8.7 (221)	0.275 (7.0)	2.00 (51)	120 (534)	Weather Resistant Nylon 6.6	Black	UV Resistant	✓	V-2	2, 21, 2S, 21S	50	GTH-E, GS4H-E, GS4EH-E, PTH, STH2, ST3EH		
BT3LH-L0	11.8 (300)		3.00 (76)											
BEST SELLER BT4LH-L0	14.9 (378)		4.00 (102)										250	
BEST SELLER BT4LH-TL0			5.00 (127)											50
BEST SELLER BT5LH-L0														
BEST SELLER BT5LH-C0	18.1 (460)		7.00 (178)								100			
BT7LH-L0	24.4 (620)		9.00 (229)								50			
BT9LH-L0	30.7 (780)													



Dome-Top® Barb Ty Cable Ties – Heat Stabilized Nylon 6.6

- For high temperature applications up to 239°F (115°C) – indoor use
- Dome-top head features unique patented design with round, smooth edges
- Stainless steel locking barb provides consistent performance, reliability, and infinite adjustability through entire bundle range
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation



BT2S-M30



BT2S-M39

Part Number	Length In. (mm)	Width In. (mm)	Max Bundle Diameter In. (mm)	Minimum Loop Tensile Strength Lbs. (N)	Material	Color	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Pkg. Qty.	Installation Tools
-------------	-----------------	----------------	------------------------------	--	----------	-------	-----------------------	-------------------	---------------------------	---------------	-----------	--------------------

Miniature Cross Section

BT2M-M30	7.9 (201)	0.095 (2.4)	2.00 (51)	18 (80)	Heat Stabilized Nylon 6.6	Black	Heat Resistant	—	V2	2, 21	1000	GTS-E, GS2B-E, PTS, PPTS, STS2
----------	--------------	----------------	--------------	------------	---------------------------------	-------	-------------------	---	----	-------	------	--

Intermediate Cross Section

BT1.5I-M30	6.1 (155)	0.141 (3.6)	1.50 (38)	40 (178)	Heat Stabilized Nylon 6.6	Black	Heat Resistant	—	V2	2, 21	1000	GTS-E, GS2B-E, PTS, PPTS, STS2
BT3I-M30	11.3 (287)		3.00 (76)									

Standard Cross Section


BT2S-M30	8.0 (203)	0.185 (4.7)	2.00 (51)	50 (222)	Heat Stabilized Nylon 6.6	Black	Heat Resistant	—	V2	2, 21	1000	GTS-E, GS2B-E, GTH-E, GS4H-E, PTS, PTH, PPTS, STS2, STH2
BT2S-M39						Natural						
BT4S-M30	15.1 (384)		4.00 (102)			Black						



Dome-Top® Barb Ty Clamp Tie – Nylon 6.6

- For temperature applications up to 185°F (85°C) – indoor use
- Used to secure a cable bundle to another surface such as a control panel, communication rack, wall or ceiling
- Design allows for bundling before or after screwing clamp in place

- Stainless steel locking barb provides consistent performance, reliability, and infinite adjustability through entire bundle range
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation
- UL Listed for use in plenum or air handling spaces per NEC

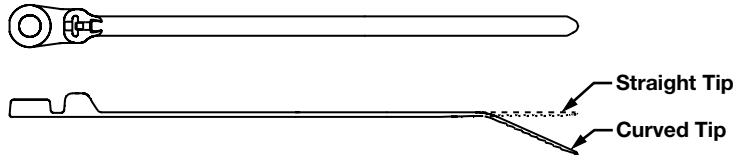

Standard Cross Section

Part Number	Length In. (mm)	Width In. (mm)	Max Bundle Diameter In. (mm)	Minimum Loop Tensile Strength Lbs. (N)	Material	Color	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Pkg. Qty.	Installation Tools
BC2S-S10-C	8.5 (216)	0.185 (4.7)	2.00 (51)	50 (222)	Nylon 6.6	Natural	—	✓	V2	2, 21	100	GTS-E, GS2B-E, GTH-E, GS4H-E