




Locking Tie Cable Ties – Heat Stabilized Nylon 6.6

- For high temperature applications up to 239°F (115°C) – indoor use
 - One-piece construction for consistent performance and reliability
 - Among the lowest threading force of any one-piece cable tie in the industry
 - Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation
- 
- Straight Tip



Part Number	Length In. (mm)	Width In. (mm)	Max Bundle Diameter In. (mm)	Minimum Loop Tensile Strength Lbs. (N)	Material	Color	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Pkg. Qty.	Installation Tools
-------------	-----------------------	----------------------	---------------------------------------	--	----------	-------	--------------------------	-------------------------	---------------------------------	---------------------	--------------	-----------------------

Subminiature Cross Section

PLT.6SM-M30	2.8 (71)	0.070 (1.8)	.60 (15)	8 (36)	Heat Stabilized Nylon 6.6	Black	Heat Resistant	—	V-2	1, 11	1000	GTS-E, PTS
-------------	-------------	----------------	-------------	-----------	---------------------------------	-------	-------------------	---	-----	-------	------	---------------

Miniature Cross Section

BEST SELLER	PLT1M-M30	3.9 (99)	0.098 (2.5)	0.87 (22)	18 (80)	Heat Stabilized Nylon 6.6	Black	Heat Resistant	—	V-2	2, 21	1000	GTS-E, GS2B-E, PTS, PPTS, STS2
	PLT1.5M-M30	5.6 (142)		1.25 (32)									
	PLT2M-M30	8.0 (203)		2.00 (51)									

Intermediate Cross Section

PLT2I-C30	8.0 (203)	0.142 (3.6)	2.00 (51)	40 (178)	Heat Stabilized Nylon 6.6	Black	Heat Resistant	—	V-2	2, 21	100	GTS-E, GS2B-E, PTS, PPTS, STS2
PLT3I-M30	11.4 (290)	0.145 (3.7)	3.00 (76)								1000	
PLT4I-M30	14.5 (368)		4.00 (102)									

Standard Cross Section

PLT1S-M30	4.8 (122)	0.190 (4.8)	1.00 (25)	50 (222)	Heat Stabilized Nylon 6.6	Black	Heat Resistant	—	V-2	2, 21	1000	GTS-E, GS2B-E, GTH-E, GS4H-E, PTS, PPTS, PTH, STS2, STH2
PLT5S-M30	17.5 (445)		5.00 (127)									

Light-Heavy Cross Section (Straight Tip)

PLT2H-TL30	8.1 (206)	0.300 (7.6)	2.00 (51)	120 (534)	Heat Stabilized Nylon 6.6	Black	Heat Resistant	—	V-2	2, 21	250	GTH-E, GS4H-E, GS4EH-E, PTH, STH2, ST3EH
PLT3H-TL30	11.4 (290)		3.00 (76)									
PLT4H-TL30	14.5 (368)		4.00 (102)									
PLT7LH-C30	24.7 (627)		7.00 (178)									
PLT9LH-C30	30.5 (775)		9.00 (229)								100	


Heavy Cross Section (Straight Tip)

PLT5H-C30	17.7 (450)	0.350 (8.9)	5.00 (127)	175 (778)	Heat Stabilized Nylon 6.6	Black	Heat Resistant	—	V-2	1, 11	100	GTH-E, GS4H-E, GS4EH-E, PTH, STH2, ST3EH
PLT6H-C30	20.9 (530)		6.00 (152)									
PLT8H-C30	30.6 (779)		9.00 (229)									



Locking Tie Cable Ties – Heat Stabilized Weather Resistant Nylon 6.6

- Greater resistance to damage caused by ultraviolet light and for high temperature applications up to 239°F (115°C) – indoor or outdoor use
- One-piece construction for consistent performance and reliability
- Among the lowest threading force of any one-piece cable tie in the industry
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation

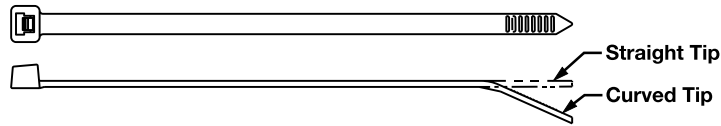

Part Number	Length In. (mm)	Width In. (mm)	Max Bundle Diameter In. (mm)	Minimum Loop Tensile Strength Lbs. (N)	Material	Color	Resistance Properties	AH-2 Plenum Rated	UL 94 Flammability Rating	UL 62275 Type	Pkg. Qty.	Installation Tools
-------------	-----------------------	----------------------	---------------------------------------	--	----------	-------	--------------------------	-------------------------	---------------------------------	---------------------	--------------	-----------------------

Miniature Cross Section

PLT1M-M300	3.9 (99)	0.098 (2.5)	0.87 (22)	18 (80)	Heat Stabilized Weather Resistant Nylon 6.6	Black	Heat and UV Resistant	✓	V-2	2	1000	GTS-E, GS2B-E, PTS, PPTS, STS2
-------------------	-------------	----------------	--------------	------------	---	-------	-----------------------------	---	-----	---	------	--

Intermediate Cross Section

PLT2I-M300	8.0 (203)	0.142 (3.6)	2.00 (51)	40 (178)	Heat Stabilized Weather Resistant Nylon 6.6	Black	Heat and UV Resistant	✓	V-2	2	1000	GTS-E, GS2B-E, PTS, PPTS, STS2
-------------------	--------------	----------------	--------------	-------------	---	-------	-----------------------------	---	-----	---	------	--

Standard Cross Section

PLT2S-M300	7.4 (188)	0.190 (4.8)	1.88 (48)	50 (222)	Heat Stabilized Weather Resistant Nylon 6.6	Black	Heat and UV Resistant	✓	V-2	2	1000	GTS-E, GS2B-E, GTH-E, GS4H-E, PTS, PTH, PPTS, STS2, STH2
PLT4S-M300	14.5 (368)	0.190 (4.8)	4.00 (102)									

Light-Heavy Cross Section (Straight Tip)

PLT4H-TL300	14.5 (368)	0.300 (7.6)	4.00 (102)	120 (534)	Heat Stabilized Weather Resistant Nylon 6.6	Black	Heat and UV Resistant	✓	V-2	2	1000	GTH-E, GS4H-E, GS4EH-E, PTH, STH2, ST3EH
--------------------	---------------	----------------	---------------	--------------	---	-------	-----------------------------	---	-----	---	------	---