




F6X - Flame Retardant F6® Woven With Nomex® And PPS


Protection of wiring systems on today's modern aircraft requires a braided sleeving company that can take that protection to new heights. Techflex's® F6X is the result of many years of R&D and insight into the aviation industry. F6X is made from genuine Nomex® for years of durable service. In your application, F6X maximizes harness coverage with minimum waste. The essential flame retardancy of Nomex® will meet even the most rigorous specifications and can be used in any major aircraft program. As always, Techflex's® F6® self-wrapping closure system will make installation a breeze keeping your process lean.

Today we make 8 sizes of F6X and are capable of matching any of your special requirements including cut lengths or custom diameters. Call your braided sleeving specialist for more details.

- **Operating Temp.**
-76°F to 392°F
- **Fire Retardant**
- **Halogen Free**
- **Wall Thickness**
0.027" (±0.005")
- **Cut Easily With Scissors**
- **Tracer Indicating Maximum Operating Diameter**

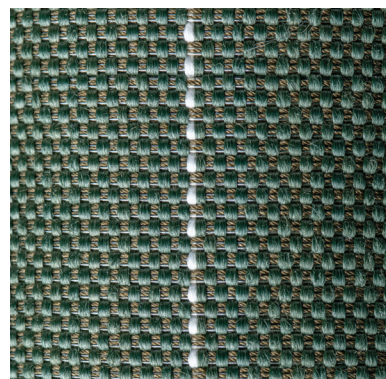

Nominal Size	Part #	Flat Width	Standard Spool Put-Ups			Available Colors	Lbs/100'
			Bulk Spool	Box A	Box B		
3/16"	F6X0.19GN	1 3/16"	1,200'	600'	200'	Green (GN)	0.96
5/16"	F6X0.31GN	1 5/8"	650'	325'	125'	Green (GN)	1.20
1/2"	F6X0.50GN	2 1/2"	300'	150'	75'	Green (GN)	1.80
5/8"	F6X0.63GN	3"	250'	125'	75'	Green (GN)	2.16
3/4"	F6X0.75GN	3 3/4"	150'	100'	50'	Green (GN)	2.76
1"	F6X1.00GN	4 13/16"	100'	75'	50'	Green (GN)	3.36
1 1/4"	F6X1.25GN	6"	100'	50'	25'	Green (GN)	4.05
1 1/2"	F6X1.50GN	7 7/8"	50'	25'	-	Green (GN)	5.14

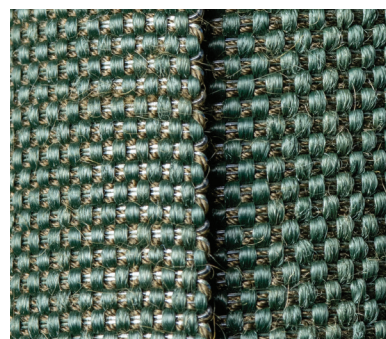

Nomex® is a registered trademark of DuPont Corporation.

